

ART 715-A MK4

ACTIVE TWO-WAY SPEAKER

Product Detail

A versatile 15-inch active loudspeaker designed for dependable full-range reinforcement, fast deployment, and controlled performance for portable and installed applications.

1400 W Peak

Built-in two-channel amplification for powerful output and simplified setup.

130 dB Max SPL

High acoustic output for speech, music playback, and live reinforcement.

FIRPHASE DSP

Integrated processing for crossover, equalization, protection, and phase control.



Product Positioning

Positioning

A compact yet high-output active speaker for users who want the convenience of an integrated amplifier, practical handling, and balanced full-range sound from a 15-inch platform.

Core Value

Combines strong vocal intelligibility, extended low-frequency control, broad coverage, and straightforward connectivity in a single portable enclosure.

Typical Uses


Portable PA • Mobile performance • Corporate AV • Rehearsal spaces • Small venues • Worship and event reinforcement



Key Performance


Max SPL

130 dB




Frequency Response

45 Hz – 20000 Hz




Total Power

**1400 W Peak / 700
W RMS**




Coverage

90° H × 60° V




HF Driver

1 × 1.0" / 1.75" v.c.



LF Driver

1 × 15" / 2.5" v.c.



Acoustic & Enclosure Design



Integrated Acoustic Platform

15-inch woofer plus 1-inch compression driver, managed by built-in DSP for crossover, equalization, and protection.

Enclosure Construction

PP composite cabinet with steel grille, ergonomic handles, and practical rigging / mounting hardware.




Top / Pole Socket

Top section with integrated pole socket for stand or sub-pole deployment.



Side Handle

Integrated carry handle supports easier transport and fast repositioning.

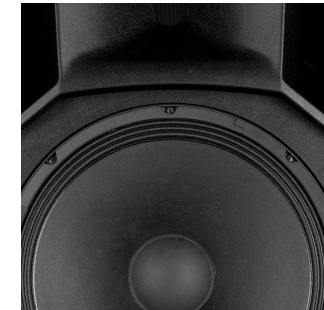

Low-Frequency Section

15-inch woofer engineered for controlled low-frequency response and linearity.

Other Physical Details

Convection cooling • 2 × M10 hardware points • 1 top and 2 side handles • Soft limiter, thermal and RMS protections

Technical Specifications

Product Model	ART 715-A MK4	Coverage / Dispersion	90° × 60°
Type	Active Two-Way Speaker	Enclosure	PP Composite cabinet
Drivers	1 × 1.0" compression driver, 1.75" v.c.; 1 × 15" woofer, 2.5" v.c.	Finish	Black
Frequency Response	45 Hz – 20000 Hz	Protective Grille	Steel
Rated Power	700 W RMS (200 W HF + 500 W LF)	Connectors	Input: XLR, Jack Output: XLR Power: VDE
Peak Power	1400 W Peak (400 W HF + 1000 W LF)	Dimensions	708 × 437 × 389 mm (H × W × D)
Sensitivity	Not specified in official datasheet	Weight	19.6 kg
Maximum SPL	130 dB	Supplied Fittings	2 × M10 hardware points; 1 top handle, 2 side handles
Nominal Impedance	Not specified (active loudspeaker)	Recommended Amplifier	N/A — built-in two-channel amplifier

- Additional official parameters: Input signal bal/unbal
- Input sensitivity -2 dBu / +4 dBu
 - Controls Volume, Boost, Mic/Line
 - Mic input sensitivity -32 dBu
 - Cooling Convection
 - Crossover 1600 Hz
 - Safety agency CE compliant

System Application / Rigging

AC PRO-FS

Professional loudspeaker floor stand for standalone deployment.

Applicable range: 35 mm speaker pole mounting.



PM-KIT M20

Adjustable pole for mounting the speaker above a subwoofer.

Applicable range: pole-mount subwoofer systems.



AC PRO-PM

Pole mount with ring lock and height adjustment.

Applicable range: 35 mm insert speaker support.



H-BR 2X ART 715

Horizontal bracket with adjustable inclination.

Applicable range: ART 715-A / 725-A / 735-A / 745-A / 415-A / 425-A.



Official accessory set supports floor-standing deployment, pole mounting, protective transport, and bracket-based installation. Images shown are official manufacturer materials.

Deployment Options

1 Standalone Speaker

Use as a self-powered full-range cabinet for direct portable reinforcement.

Best for: speech, music playback, compact live events.



2 On Subwoofer Pole

Combine with a subwoofer using PM-KIT M20 / AC PRO-PM / AC PMX.

Best for: extended low-frequency systems.



3 On Floor Stand

Mount on AC PRO-FS stand to raise coverage height.

Best for: DJ, presentation, small venue PA.



4 Bracket Installation

Use H-BR 2X ART 715 for horizontal support with adjustable tilt.

Best for: wall / overhead style placement where suitable.




Use the built-in amplifier for simplified setup; select the mounting hardware according to venue layout, coverage height, and support method.

Technical Drawing / Dimensions

完整官方技术图纸高清展示

Art 2D

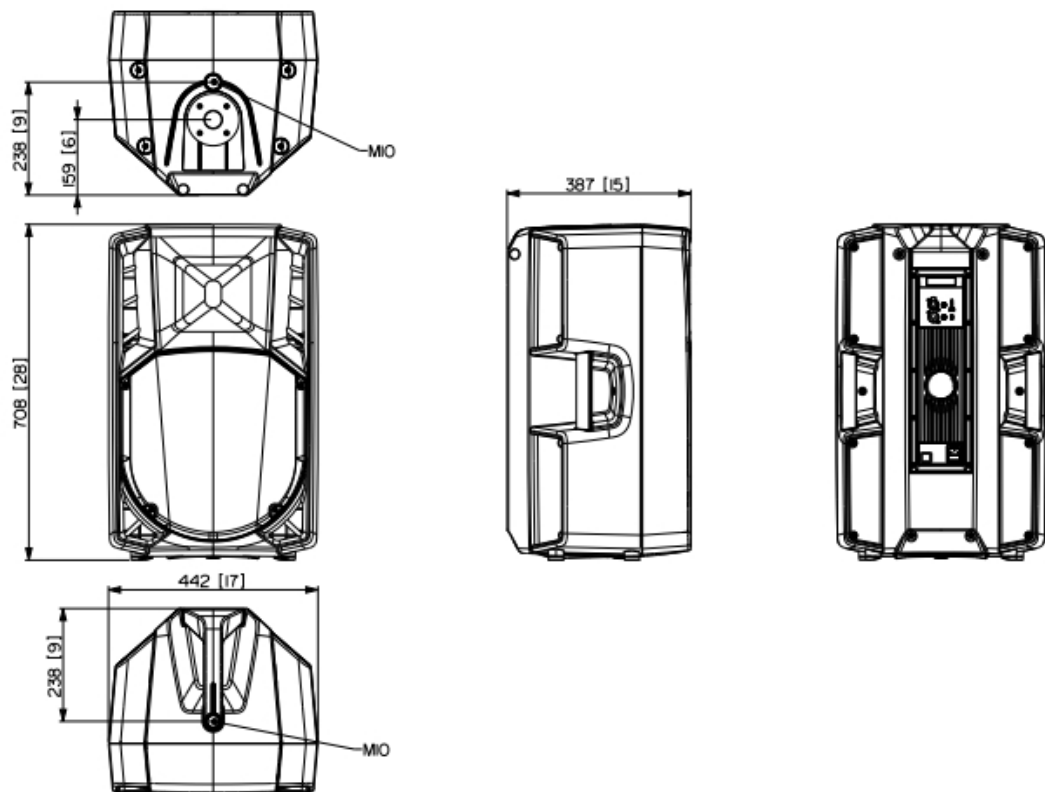

Overall Dimensions

Height: 708 mm
Width: 437 mm
Depth: 389 mm

Rigging Points

2 × M10 hardware points

Handling

1 top handle + 2 side handles

Note

Technical drawing recreated from the latest official datasheet with brand / footer elements removed from the presentation layout.

Connections & Hardware Details

接口面、连接方式及结构细节

Rear Panel Overview

Inputs: XLR / Jack

Output: XLR link

Controls: Volume, Boost, Mic / Line

Power: VDE connection



Top Mount



Integrated top
socket area for
stand / pole use.

Cabinet Handle




Large side handle
for transport and
handling.

Front Acoustic Face



Horn + grille layout
supporting
controlled coverage.

Low-Frequency Detail



Close-up view of the
15-inch woofer
section behind the
grille.

Accessories

CVR ART 725

Protective cover — protects the speaker from scratches and hits — applicable to ART 715-A / 725-A / 735-A / 745-A / 415-A / 425-A.



AC PRO-FS

Professional loudspeaker floor stand — used for elevated standalone placement — applicable to 35 mm pole-mount deployment.



PM-KIT M20

M20 pole mount — used to place the speaker above a subwoofer — applicable to subwoofer pole systems.



H-BR 2X ART 715

Horizontal bracket — used for supported horizontal mounting with adjustable inclination — applicable to ART 715-A family models.



Additional official accessories

AC PMX — Speaker pole mount — for 35 mm insert speakers.

AC PRO-PM — Pole mount with ring lock — height adjustable; 35 kg max load.

AC PMA — Pole mount kit — Image not available in official materials.

AC PRO-LF / AC S260 / AC XLR 3M3F — Additional official accessories listed in the manufacturer datasheet. Image not available in official materials.

For previous version compatibility only: none specifically indicated in the official materials reviewed for this product page.

Application Scenarios

Live Performance

Portable full-range reinforcement for small band or vocal applications.

Mobile DJ

Straightforward active setup with fast load-in and minimal external hardware.

Corporate AV

Clear speech projection and flexible input options for events or presentations.

Worship Spaces

Balanced music and speech reinforcement in compact venue layouts.

Rehearsal / Studio Use

Useful as a powerful rehearsal loudspeaker or playback monitor.

Venue Installation

Can be stand-mounted or bracket-supported where appropriate hardware is used.

These application scenarios are descriptive usage references created for presentation purposes and do not represent official case-study photography.

Product Summary



ART 715-A MK4

ACTIVE TWO-WAY SPEAKER

Max SPL

130 dB

Power

1400 W Peak

Response

45 Hz – 20 kHz

Coverage

90° × 60°

Summary: a practical 15-inch active speaker that combines strong output, broad coverage, simple connectivity, and flexible deployment support from the official accessory ecosystem.