IPH-1800

Rainproof Haze Machine

Smooth haze for medium and large outdoor events.



Product rendering

1,600 W

RATED POWER

35,000 ft³/min

APPROX. FOG OUTPUT

5 L

FLUID TANK

Haze production & control

IPX3 rainproof housing

Outdoor housing with stable, adjustable haze.
Chinese/English display for local operation.

Heater & temperature control


Stainless steel tubular heater with
optimised heat transfer and intelligent sensing.

Quiet, long-throw airflow

High-pressure fan with linear airflow adjustment.

Fluid storage & handling

Concealed 5 L tank and wheels for easy handling.
Stable circuitry resists signal interference.

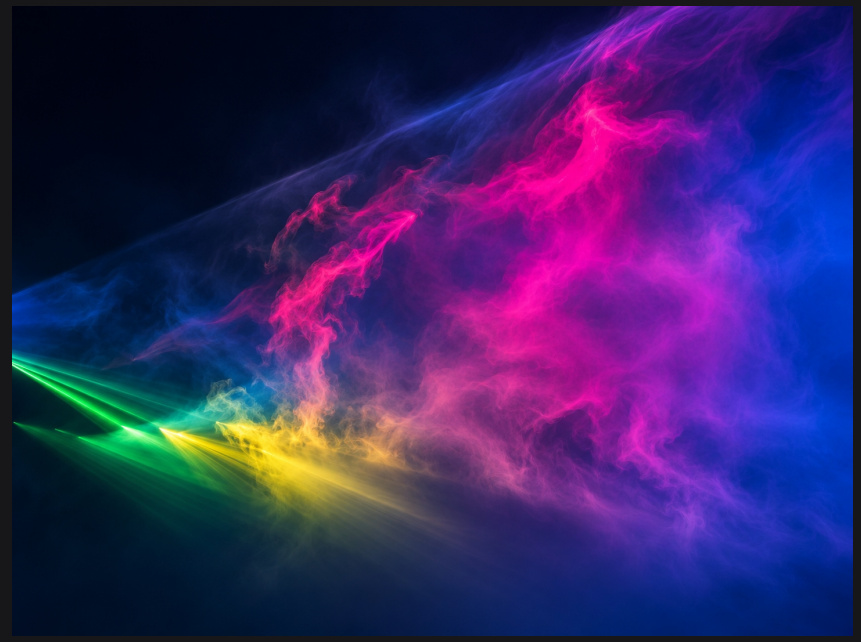

Haze effect illustration

Power, output & control

Electrical & performance

PARAMETER	SPECIFICATION
Input voltage	**AC 220–240 V, 50/60 Hz**
Fuse	**10 A / 250 V**
Rated power	**1,600 W**
Warm-up time	**Approx. 4.5 min**
Fog output	**Approx. 35,000 ft³/min**

Control & protection

PARAMETER	SPECIFICATION
Output adjustment	**Linear haze & airflow**
DMX512	**Supported**
DMX channels	**2**
Wireless remote	**Supported**
Rain resistance	**IPX3**

Results may vary with operating conditions.

Consumables & transport

Fluid system

PARAMETER	SPECIFICATION
Fluid tank	**5 L**
Fluid type	**FG-1 high-density fog fluid**
Fluid consumption	**Approx. 35 mL/min**
Tank design	**Concealed**

Dimensions & weight

PARAMETER	SPECIFICATION
Unit dimensions	**541 × 370 × 431 mm**
Carton dimensions	**620 × 400 × 500 mm**
Net weight	**17 kg**
Gross weight	**19.5 kg**

Display, airflow & handling

FEATURE	SPECIFICATION
Display	**Chinese / English**
Fan	**Quiet, high-pressure, long-throw**
Handling	**Wheels for easy movement**