

PANTHER-L

Large-Format Linear Line Array Loudspeaker

150.5 dB

Maximum sound level · burst noise


55 Hz–16 kHz

Operating frequency range

80° horizontal

Variant-specific coverage

Official product detail · English specifications

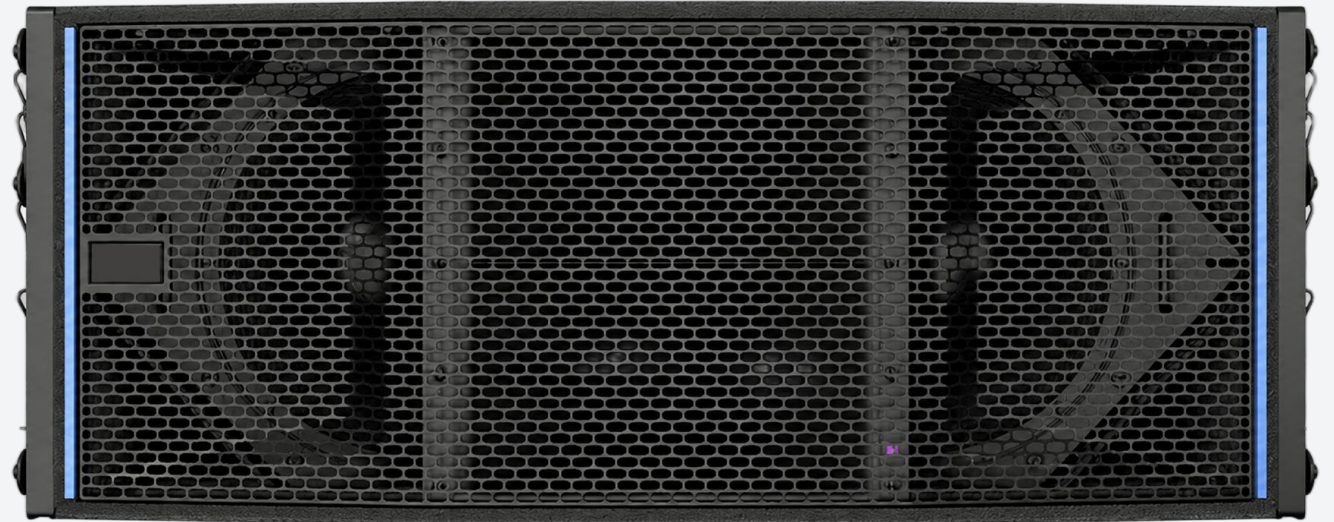

Product Positioning

Festival-scale output. Modern touring efficiency.


PANTHER-L combines a 150.5 dB maximum sound level with a 150 lb self-powered cabinet and 80° horizontal coverage for large-format reinforcement.

Applications

Festivals · arenas · stadiums · theatres · large performance venues · corporate productions

Core value

High output, reduced transport mass, lower power draw, Milan AVB connectivity and weather-ready deployment.

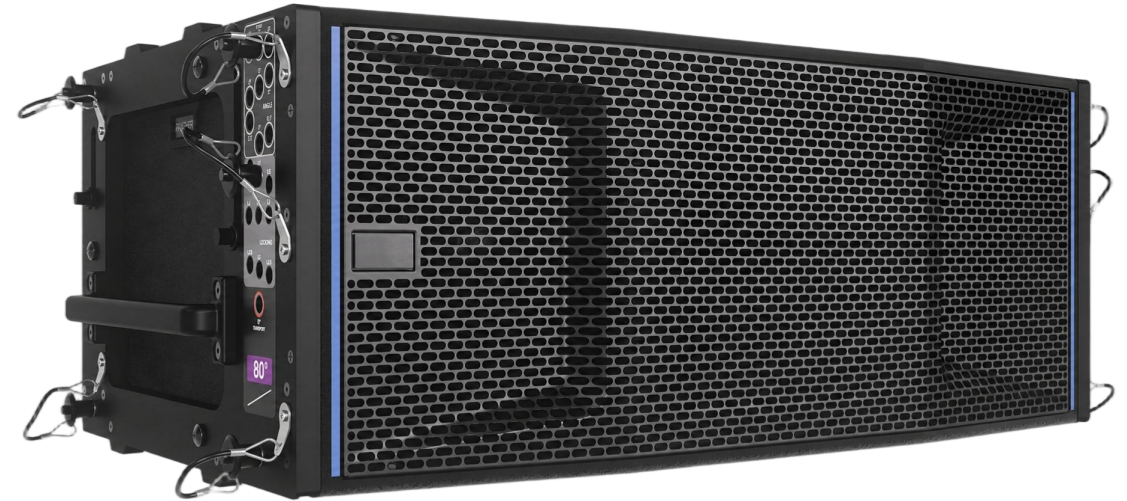

VARIANT ROLE

Focused 80° coverage supports long-throw main arrays and precise horizontal control.

Key Performance

150.5 dB

Maximum sound level

55 Hz–16 kHz

Operating frequency range

80°

Horizontal coverage

150 lb / 68 kg

Net weight

IP55

With Neutrik TOP cabling

2200 W

Burst power consumption

AES75 MAXIMUM LINEAR SOUND LEVELS

127.5 dBZ · 144.5 dBZpk · 125.5 dBA

Measured at 50 °C with RMS input level +8.3 dBV.



Acoustic & Enclosure Design

Low frequency


Two 12-inch long-excursion cone drivers; 4 Ω nominal impedance.

High frequency

Two 3-inch diaphragm compression drivers coupled to a computationally optimized horn; 8 Ω nominal impedance.

Directional design

Unique low-mid placement and optimized horn maintain controlled directivity across the operating range.

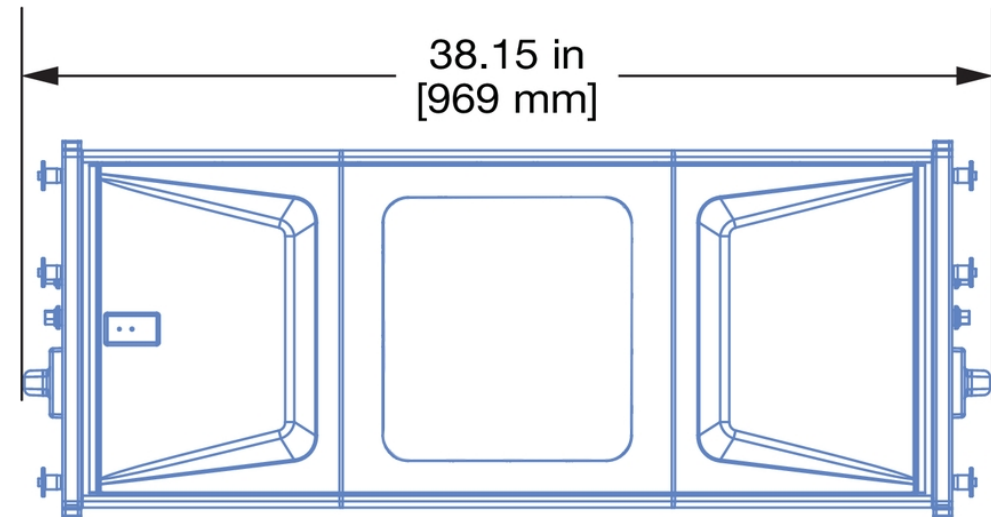

ENCLOSURE


Premium multi-ply birch · slightly textured black finish · stamped steel grille · UV-resistant, IP55 weather-ready construction.

Technical Specifications

PARAMETER	OFFICIAL SPECIFICATION
Product Model	PANTHER-L
Type	Large-format linear line array loudspeaker
Drivers	2 × 12 in LF; 2 × 3 in diaphragm HF compression drivers
Frequency Response	Not specified in official materials; operating range 55 Hz–16 kHz
Rated Power	Not specified in official materials
Peak Power	Not specified; burst power consumption: 2200 W
Sensitivity	Not specified in official materials
Maximum SPL	150.5 dB maximum sound level; AES75 values listed separately
Nominal Impedance	LF: 4 Ω; HF: 8 Ω
Coverage / Dispersion	80° horizontal; vertical depends on array configuration

PARAMETER	OFFICIAL SPECIFICATION
Enclosure	Premium multi-ply birch
Finish	Slightly textured black
Protective Grille	Powder-coated stamped steel
Connectors	XLR 3-pin TOP in/loop; etherCON TOP AVB; powerCON TRUE1 TOP
Dimensions	W 38.15 × H 14.85 × D 22.25 in (969 × 377 × 565 mm)
Weight	150 lb (68 kg)
Supplied Fittings	Captive GuideALinks, quick-release pins, detachable side handles
Recommended Amplifier	Self-powered; no external amplifier required
AC Power	200–240 V AC, 50/60 Hz; 1100 W max long-term
Ingress Protection	IP55 with properly terminated Neutrik TOP cables

System Application / Rigging

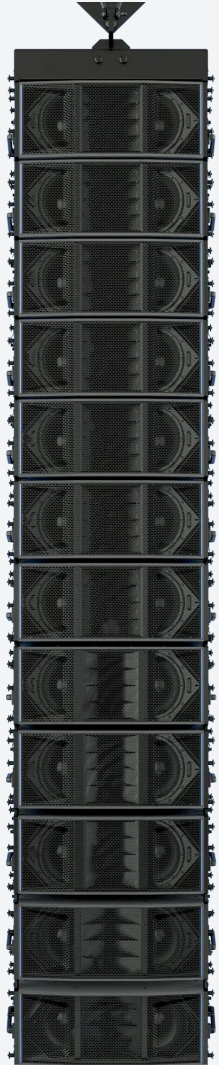

MG-PANTHER GRID KIT

Top grid for flying PANTHER arrays with single- or multi-point suspension.



MVP MOTOR V PLATE

Connects two motors to a single grid or loudspeaker rigging point.

Captive GuideALinks and quick-release pins provide 0.5°–9° inter-cabinet splay angles. All configurations must follow official load limits and MAPP 3D verification.

Deployment Options



SINGLE CABINET

80° horizontal pattern for compact fills or distributed reinforcement.



FLOWN ARRAY

Curved arrays tailor vertical coverage through 0.5°–9° inter-cabinet splay angles.




FOUR+ ELEMENT ARRAY

Arrays of four or more functionally create a cardioid low-frequency polar pattern.


MAPP System Design Tool provides official prediction of coverage and SPL for project-specific array configurations.

Technical Drawing / Dimensions

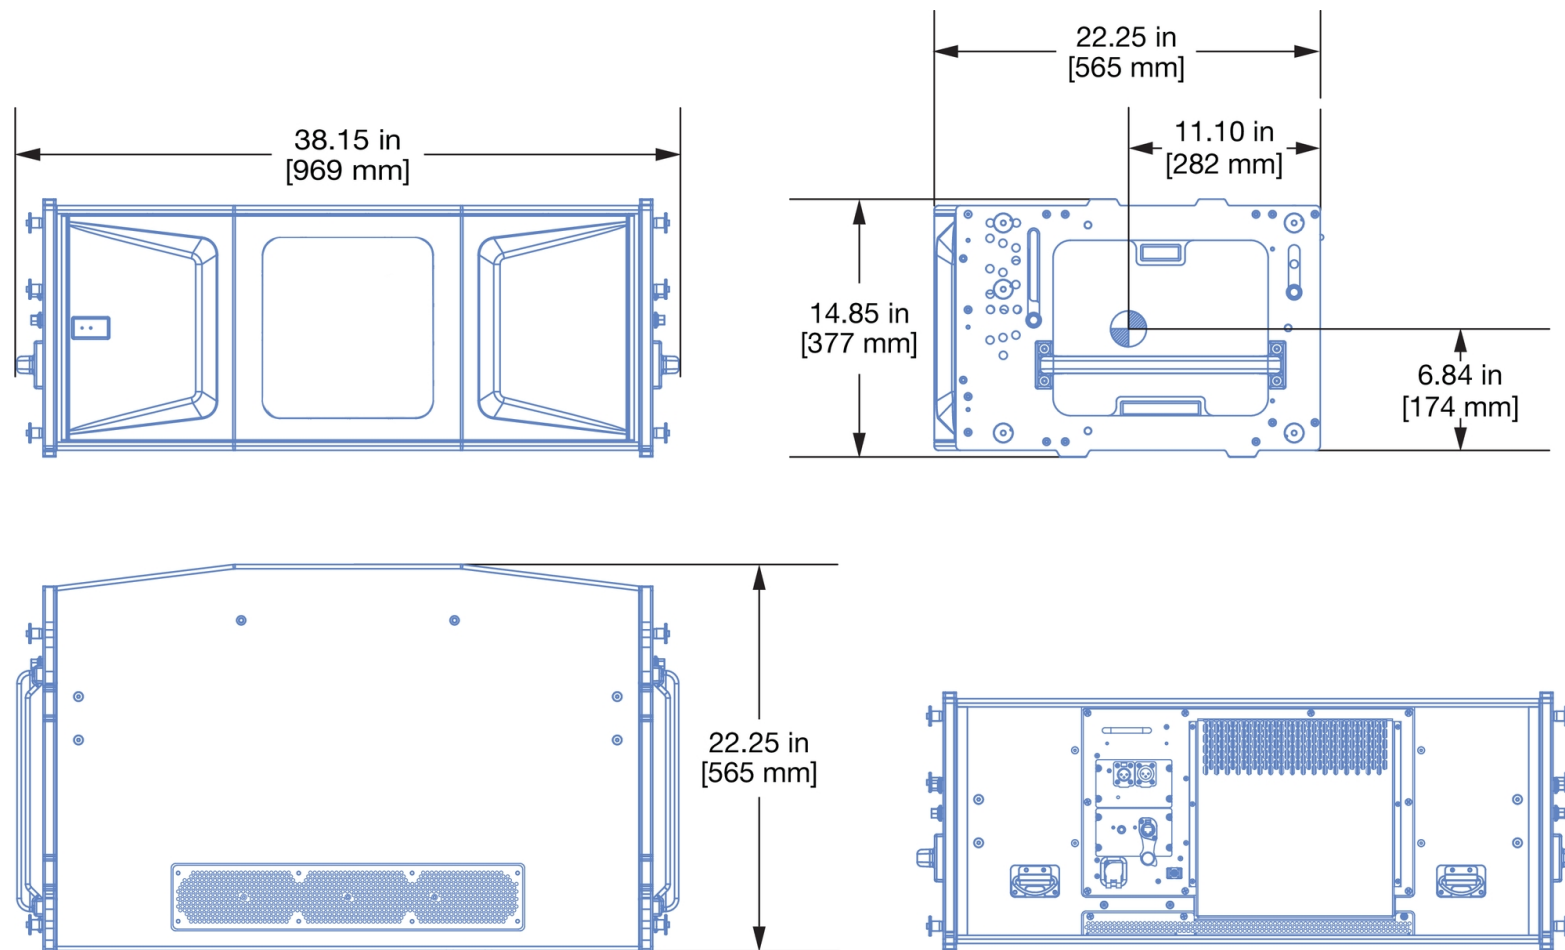

W 38.15 in (969 mm) • H 14.85 in (377 mm) • D 22.25 in (565 mm) • Weight 150 lb (68 kg)

Connections & Hardware Details

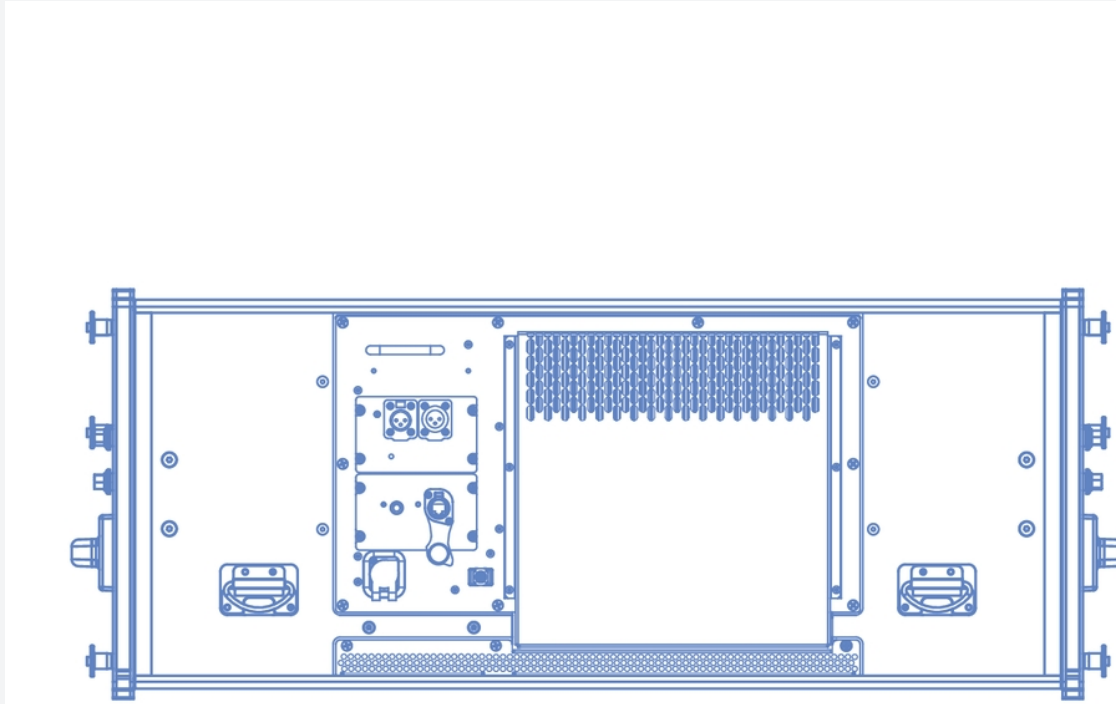

Analog audio

Neutrik XLR 3-pin TOP female input with male loop output; source capable of +24 dBu into 50 Ω for maximum peak SPL.

Digital audio

Neutrik etherCON TOP; AVB digital format; Milan Certified endpoint with loudspeaker telemetry.

Power

Neutrik powerCON TRUE1 TOP; 200–240 V AC, 50/60 Hz. Maximum long-term consumption 1100 W.

Hardware: captive GuideALinks · 0.5°–9° splay · detachable side handles · IP55 with TOP connectors

Accessories



MCF-PANTHER

Caster frame; transports up to four cabinets



MG-PANTHER

Top grid for flying PANTHER arrays



MVP MOTOR V PLATE

Two-motor connection to one grid point



4-HIGH COVER


Pullover cover for four PANTHER cabinets



PBF-LYON

Pull-back bar for additional array downtilt

PANTHER shares the LYON footprint and is compatible with selected LYON accessories; follow current official documentation for load and configuration limits.

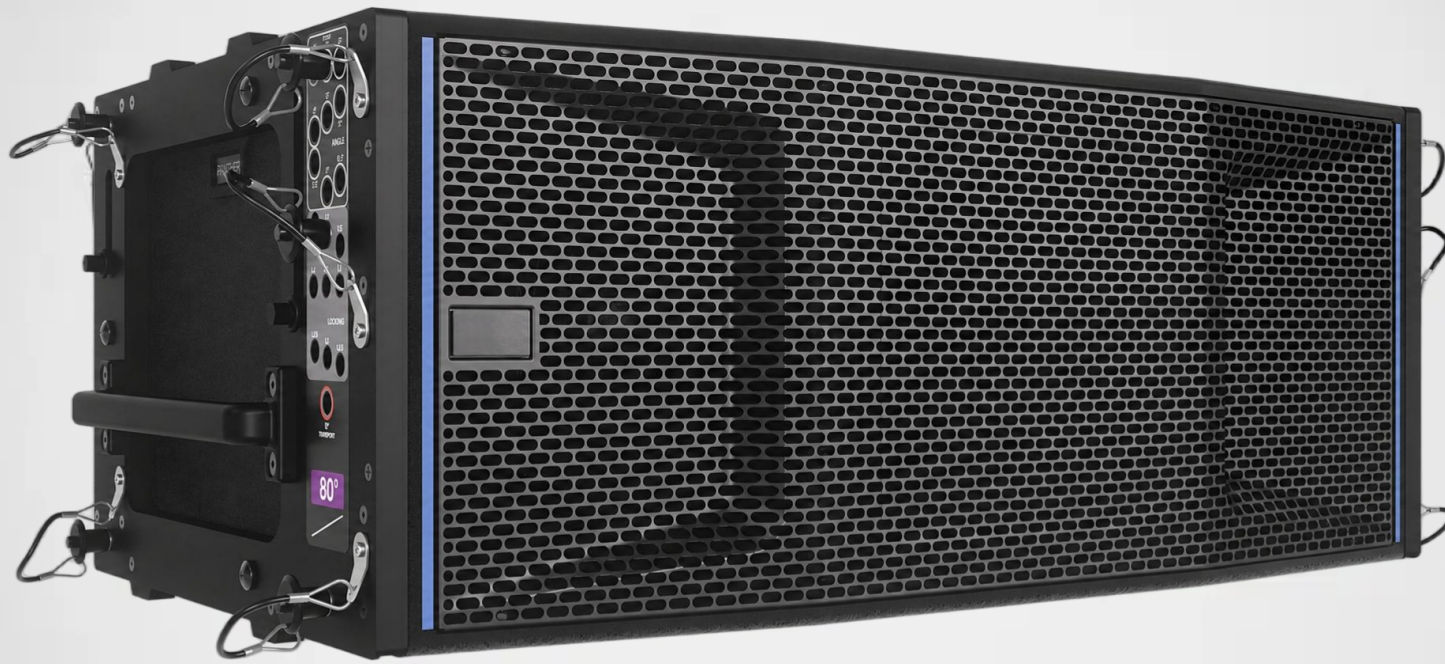

Application Scenarios

Festivals

Arenas & stadiums

Theatres

Large performance venues

Corporate productions

Scenario categories reflect official product positioning; imagery illustrates product orientation and is not presented as a named installation.

Product Summary

PANTHER-L

Large-format self-powered line array loudspeaker

150.5 dB

Maximum sound level

55 Hz–16 kHz


Operating range

80°

Horizontal coverage

150 lb / 68 kg

Weight

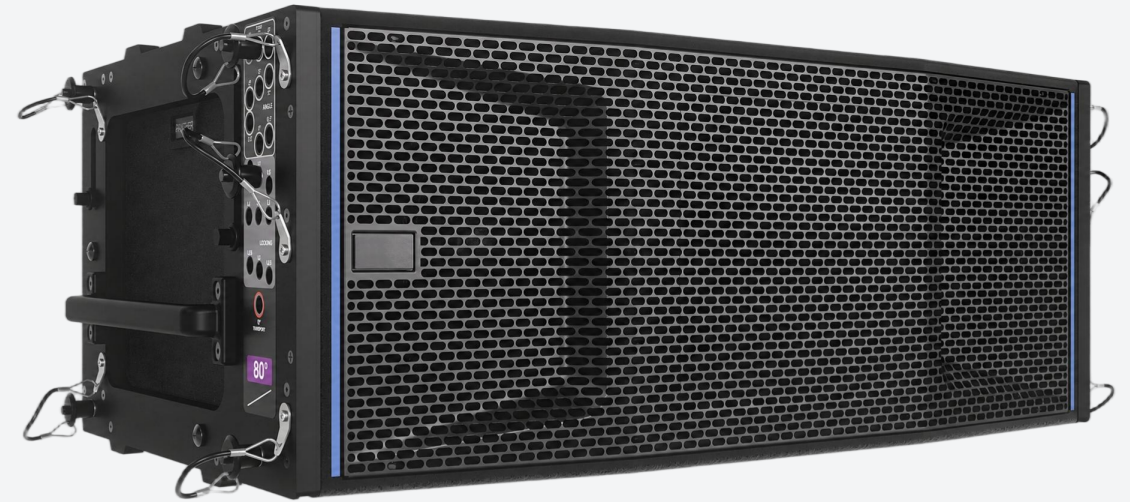

CONTACT / SALES INFORMATION

Company · Contact · Phone · Email · Website